

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 29 TOWNSHIP 15 RANGE 4

DATE: 8-14-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison fd

METHOD OF ESTABLISHMENT: County: 4-17-02



IN. S.P.C. E ZONE NAD '83

NAME: 15042904

N: 496062.7919(m)

E: 61070.9716(m)

Note: point falls on Keystone under bridge
its 1'+/- E of median of N-bound turn lane.

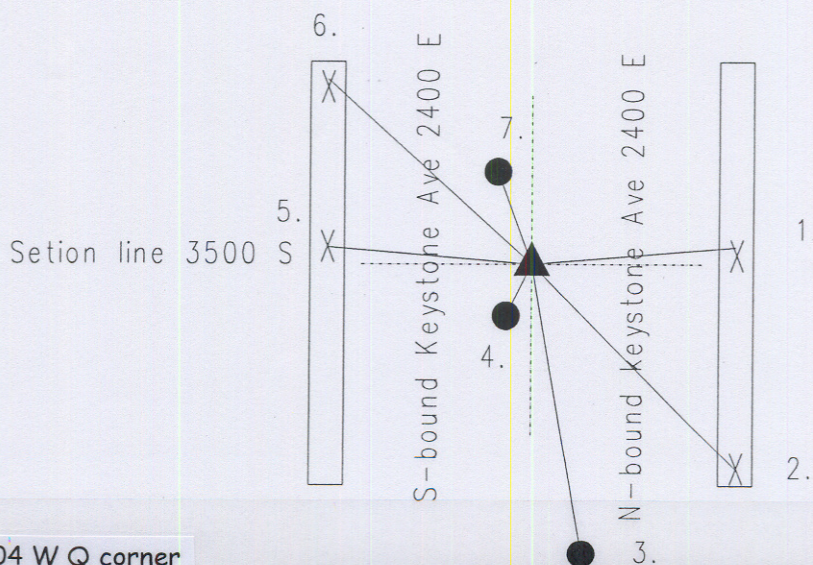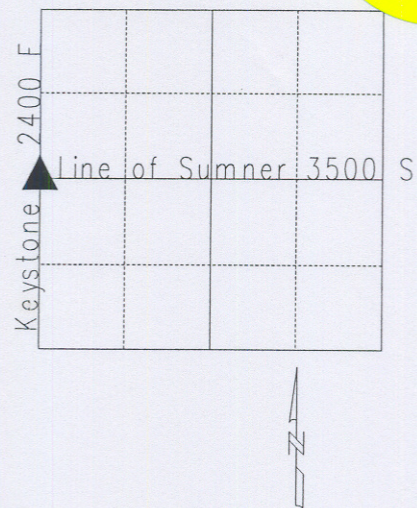

15042904 W Q corner

CORNER HISTORY: Corner originally set as post in 1820 by John Hendricks with witness:
15" hickory N 75 W 13 links; 7" beech S 70 E 35 links per Marion County Atlas pg. 10.

A survey 3-11-1896 by J. V. Coyner called stone standing w/government witness per Perry Township Legal Survey Book pg. 10. A survey dated 11-7-1849 by Percy Hosbrook called half mile with both witnesses green per Perry Township Legal Survey Book pg. 70. A survey 1-1-1849 by Percy Hosbrook called no witness. Reference dated 5-9-1963 by G.W.S. called pipe over stone. Reference dated 10-31-75 by Wilcoxon called found cut 'x' in concrete per MCSO ties. Reference dated 10-20-88 by Jacobs called cut 'x' found. Reference dated 7-23-96 by Kiste called boat spike found. Reference dated 11-8-97 called Harrison monument was set per ties found cut 'x'; no stone found. Note: point falls on Keystone under bridge it is 1'+/- E of median on N-bound turn lane. Reference dated 8-14-07 by Wilcoxon called Harrison found.

1.	39.39'	Cut 'x' in top bridge wall
2.	109.21'	Cut 'x' vertically bridge wall
3.	70.92'	Mag nail in curb joint
4.	3.99'	Mag nail in curb joint
5.	39.07'	Cut 'x' in bridge wall
6.	66.81'	Cut 'x' in top bridge wall